
VAIO DUO OVAL

- bathing with a friend: two identical back rests and centrally positioned waste
- with integrated arm rests
- made of KALDEWEI steel enamel



Similar illustration



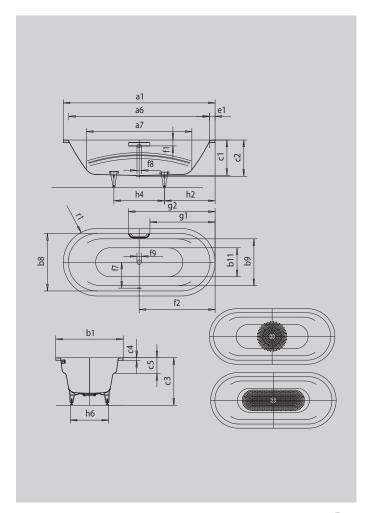

External length (top) a, 1880 mm Internal length (top) a, 1880 mm Icternal width b, 600 mm External width (bottom) b, 496 mm Internal width (bottom) b, 496 mm Internal width bathing area (with; withoutarmers) b, 490 mm Depth inside c, 420 mm Depth inside c, 430 mm Height of rim c, 30 mm Height of rim c, 30 mm Width of rim (foot end) c, 180 mm Distance top e dego to centre of overflow hole c, 180 mm Distance bath edge to centre of overflow kole f, 332 mm Distance bath edge to centre of overflow kole f, 332 mm Distance bath edge to centre of overflow kole f, 332 mm Distance bath edge (foot end) to start of gips g, 352 mm Distance bath edge (foot end) to start of gips g, 352 mm Distance bath edge (foot end) to start of gips g, 352 mm Distance bath edge (fo			
Internal length (topt) a 1680 mm Internal length (bottom) a, 1248 mm External width b, 800 mm Internal width (bottom) b, 496 mm Internal width (bottom) b, 680:555 mm Depth inside c, 420 mm Depth inside c, 420 mm Depth incl. waste hole c, 350:550 mm Height with feet c, 32 mm Height of im c, 32 mm Height of im (foot end) e, 60 mm Distance tog deg to centre of overflow hole f, 60 mm Distance tog deg to centre of overflow hole f, 332 mm Distance centre of waste hole to centre of overflow hole f, 332 mm Distance contre of waste hole to centre of overflow hole f, 332 mm Distance bath edge (foot end) to start of grip g, 152 mm Distance bath edge (foot end) to end of grip g, 152 mm Distance bath edge (foot end) to end of grip g, 600 mm Distance bottewen the fee	Model		951
Internal length (bottom) a, 1248 mm External width b, 880 mm Internal width (bittom) b, 880 mm Internal width bathing area (with; without amrest) b, b, 680, 555 mm Depth inside c, 420 mm Depth inside c, 420 mm Depth inside c, 430 mm Height of fine c, 32 mm Height of fine c, 32 mm Armrest depth c, 180 mm Distance top edge to centre of overflow hole f, 60 mm Distance top edge to centre of waste hole to centre of waste hole f, 332 mm Distance contre of waste hole to centre of waste hole f, 332 mm Distance contre of waste hole to centre of waste hole f, 332 mm Distance bath edge (foot end) to start of grip g, 352 mm Distance bath edge (foot end) to end of grip g, 352 mm Distance bath edge (foot end) to end of grip g, 360 mm Distance be bath edge (foot end) to end of grip g, 360 mm </td <td>External length</td> <td>a_i</td> <td></td>	External length	a_i	
External width b ₁ 800 mm Internal width (bottom) b ₁ 496 mm Internal width bathing area (with; without armest) b ₂ b ₂ 6880; 555 mm Depth inside c ₁ 420 mm Depth incl. waste hole c ₂ 430 mm Height with feet c ₃ 550 - 590 mm Height offim c ₄ 32 mm Armest depth c ₅ 60 mm Width of fim (foot end) e ₁ 60 mm Distance top edge to centre of overflow hole f ₁ 70 mm Distance bath edge to centre of waste hole to entre of waste hole to centre of waste hole to get entre of waste hole to centre of overflow hole f ₂ 32 mm Distance bath edge (foot end) to start of grip g ₂ 95 mm Distance bath edge (foot end) to end of grip g ₂ 95 mm Distance bath edge (foot end) to end of grip g ₂ 90 mm Distance between the feet h ₆ 600 mm Distance between the feet ween the feet h ₆ 600 mm Width of feet max. <td>Internal length (top)</td> <td>a_{6}</td> <td>1680 mm</td>	Internal length (top)	a_{6}	1680 mm
Internal width (bottom) b₁₁₁₁ 496 mm Internal width bathing area (with; without armrest) b₂, b₂ 680; 555 mm Depth inside c₁ 420 mm Depth incl. waste hole c₂ 430 mm Height with feet c₃ 550-590 mm Height of rim c₄ 32 mm Armrest depth c₂ 180 mm Width of rim (foot end) e₄ 60 mm Distance top edge to centre of overflow hole f₂ 90 mm Distance bath edge to centre of waste hole f₂ 332 mm Distance bath edge (foot end) to start of grip f₃ 052 mm Distance bath edge (foot end) to end of grip g₂ 1028 mm Distance bath edge (foot end) to end of grip g₂ 600 mm Distance between the feet h₄ 600 mm Width of feet max. h₄ 600 mm Width of feet max. h₄ 400 mm Widther feet max. h₃ 50 kg <tr< td=""><td>Internal length (bottom)</td><td>a₇</td><td>1248 mm</td></tr<>	Internal length (bottom)	a ₇	1248 mm
Internal width bathing area (with; without armrest) b _s ' b _s 680; 555 mm Depth inside c ₁ 420 mm Depth incl. waste hole c ₂ 350-590 mm Height with feet c ₃ 550-590 mm Height of rim c ₄ 32 mm Armrest depth c ₅ 180 mm Width of rim (footend) e ₁ 60 mm Distance top edge to centre of voreflow hole f ₂ 900 mm Distance beth edge to centre of waste hole to centre of waste hole to centre of waste hole of power flow hole f ₂ 332 mm Distance beth edge (foot end) to start of gip f ₉ 552 mm Distance bath edge (foot end) to start of gip g ₂ 360 mm Distance bath edge (foot end) to end of gip g ₂ 600 mm Distance between the feet h ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 455 mm External radius r ₁ 400 mm Watervolume r ₁ 400 mm Net weight r ₁ 50 kg <	External width	1	800 mm
Internal width bathing area (with; without armrest) b _s ' b _s 680; 555 mm Depth inside c ₁ 420 mm Depth incl. waste hole c ₂ 350-590 mm Height with feet c ₃ 550-590 mm Height of rim c ₄ 32 mm Armrest depth c ₅ 180 mm Width of rim (footend) e ₁ 60 mm Distance top edge to centre of voreflow hole f ₂ 900 mm Distance beth edge to centre of waste hole to centre of waste hole to centre of waste hole of power flow hole f ₂ 332 mm Distance beth edge (foot end) to start of gip f ₉ 552 mm Distance bath edge (foot end) to start of gip g ₂ 360 mm Distance bath edge (foot end) to end of gip g ₂ 600 mm Distance between the feet h ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 455 mm External radius r ₁ 400 mm Watervolume r ₁ 400 mm Net weight r ₁ 50 kg <	Internal width (bottom)	b ₁₁	496 mm
Depth incl. waste hole 6 430 mm Height with feet c ₃ 550-590 mm Height with feet c ₄ 32 mm Armest depth c ₅ 180 mm Width of rim (foot end) e ₄ 60 mm Distance beth edge to centre of overflow hole f ₄ 900 mm Distance beth edge to centre of waste hole centre of waste hole to centre of waste hole to centre of waste hole of g 900 mm Distance beth edge (foot end) to start of grip g 052 mm Distance bath edge (foot end) to start of grip g 772 mm Distance bath edge (foot end) to end of grip g 1028 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₈ 455 mm External radius r ₁ 400 mm Width of feet max. h ₈ 455 mm Net weight T 50 kg Diameter of anti-slip 50 kg 500 kg Diameter of anti-slip 400 mm 50 kg	Internal width bathing area (with; without armrest)		680; 555 mm
Height with feet c c c c c c c c c c c c c c c c c c	Depth inside	$\mathbf{c}_{_{1}}$	420 mm
Height of rim c4 32 mm Armrest depth c5 180 mm Width of rim (foot end) e1 60 mm Distance top edge to centre of werflow hole f1 70 mm Distance bath edge to centre of waste hole to centre of overflow hole f2 900 mm Distance centre of waste hole to centre of overflow hole f3 332 mm Diameter of overflow hole f3 952 mm Distance bath edge (foot end) to start of grip g1 952 mm Distance bath edge (foot end) to end of grip g2 1028 mm Distance bath edge (foot end) to end of grip g2 600 mm Distance between the feet h4 600 mm Width of feet max. h6 455 mm External radius f1 400 mm Watervolume 1551 400 mm Watervolume 50 kg 50 kg Diameter of anti-slip 50 kg	Depth incl. waste hole	C_2	430 mm
Ammest depth c ₅ 180 mm Width of rim (foot end) e ₁ 60 mm Distance top edge to centre of overflow hole f ₁ 70 mm Distance bath edge to centre of waste hole to centre of overflow hole f ₂ 900 mm Distance centre of waste hole to centre of overflow hole f ₂ 332 mm Diameter of overflow hole f ₈ 952 mm Distance bath edge (foot end) to start of grip g ₁ 772 mm Distance bath edge (foot end) to end of grip dege g ₂ 1028 mm Distance bath edge (foot end) to end of grip dege g ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 455 mm External radius r ₁ 400 mm Watervolume 1551 Netweight 50 kg Diameter of anti-slip 50 kg	Height with feet	C ₃	550 - 590 mm
Width of rim (footend) e₁ 60 mm Distance top edge to centre of overflow hole f₁ 70 mm Distance bath edge to centre of waste hole to centre of overflow hole f₂ 900 mm Distance centre of waste hole to centre of overflow hole f₂ 332 mm Diameter of overflow hole f₂ 052 mm Distance bath edge (foot end) to start of grip g₂ 052 mm Distance bath edge (foot end) to end of grip g₂ 1028 mm Distance foot end of bath edge to centre of foot h₂ 600 mm Distance between the feet h₄ 600 mm Width of feet max. h₄ 400 mm External radius r₁ 400 mm Water volume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Height of rim	C ₄	32 mm
Width of rim (foot end) e1 60 mm Distance top edge to centre of overflow hole f1 70 mm Distance bath edge to centre of waste hole f2 900 mm Distance centre of waste hole to centre of overflow hole f7 332 mm Diameter of overflow hole f8 Ø 52 mm Distance bath edge (foot end) to start of grip g1 772 mm Distance bath edge (foot end) to end of grip g2 1028 mm Distance foot end of bath edge to centre of foot h2 600 mm Distance between the feet h4 600 mm Width of feet max. h6 455 mm External radius r1 400 mm Watervolume 1551 Netweight 50 kg Diameter of anti-slip Ø 435 mm	Armrest depth	C ₅	180 mm
Distance bath edge to centre of waste hole f₂ 900 mm Distance centre of waste hole to centre of overflow hole f₂ 332 mm Diameter of overflow hole f₂ 052 mm Diameter of waste hole f₂ 052 mm Distance bath edge (foot end) to start of grip g₁ 772 mm Distance bath edge (foot end) to end of grip g₂ 1028 mm Distance foot end of bath edge to centre of foot h₂ 600 mm Distance between the feet h₄ 600 mm Width of feet max. h₆ 455 mm External radius r₁ 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Width of rim (foot end)		60 mm
Distance centre of waste hole to centre of overflow hole f ₈ 332 mm Diameter of overflow hole f ₈ 052 mm Diameter of waste hole f ₉ 052 mm Distance bath edge (foot end) to start of grip g ₁ 772 mm Distance bath edge (foot end) to end of grip g ₂ 1028 mm Distance foot end of bath edge to centre of foot h ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 455 mm External radius r ₁ 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Distance top edge to centre of overflow hole	f_{i}	70 mm
Diameter of overflow hole f ₈ Ø52 mm Diameter of waste hole f ₉ Ø52 mm Distance bath edge (foot end) to start of grip g ₁ 772 mm Distance bath edge (foot end) to end of grip g ₂ 1028 mm Distance foot end of bath edge to centre of foot h ₂ 600 mm Distance between the feet h ₄ 600 mm Width of feet max. h ₆ 455 mm External radius r ₁ 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Distance bath edge to centre of waste hole	f_2	900 mm
Diameter of waste hole fg Ø 52 mm Distance bath edge (foot end) to start of grip gg 1028 mm Distance bath edge (foot end) to end of grip gg 600 mm Distance foot end of bath edge to centre of foot hg 600 mm Distance between the feet hg 405 mm Width of feet max. hg 455 mm External radius rg 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Distance centre of waste hole to centre of overflow hole	f ₇	332 mm
Distance bath edge (foot end) to start of grip g₁ 772 mm Distance bath edge (foot end) to end of grip g₂ 1028 mm Distance foot end of bath edge to centre of foot h₂ 600 mm Distance between the feet h₄ 600 mm Width of feet max. h₆ 455 mm External radius r₁ 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Diameter of overflow hole	f ₈	Ø 52 mm
Distance bath edge (foot end) to end of grip g₂ 1028 mm Distance foot end of bath edge to centre of foot h₂ 600 mm Distance between the feet h₄ 600 mm Width of feet max. h₆ 455 mm External radius r₁ 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Diameter of waste hole	f_g	Ø 52 mm
Distance foot end of bath edge to centre of foot h_2 600 mm Distance between the feet h_4 600 mm Width of feet max. h_6 455 mm External radius r_1 400 mm Water volume 1551 Net weight 50 kg Diameter of anti-slip 4435 mm	Distance bath edge (foot end) to start of grip	g_1	772 mm
Distance between the feet h ₄ 600 mm Width of feet max. h ₈ 455 mm External radius r ₁ 400 mm Water volume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Distance bath edge (foot end) to end of grip	g_2	1028 mm
Width of feet max. h ₆ 455 mm External radius r ₁ 400 mm Water volume 155 l Net weight 50 kg Diameter of anti-slip Ø 435 mm	Distance foot end of bath edge to centre of foot	h ₂	600 mm
External radius r1 400 mm Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Distance between the feet	h ₄	600 mm
Watervolume 1551 Net weight 50 kg Diameter of anti-slip Ø 435 mm	Width of feet max.	h ₆	455 mm
Net weight 50 kg Diameter of anti-slip Ø 435 mm	External radius	r ₁	400 mm
Diameter of anti-slip Ø 435 mm	Watervolume		1551
•	Netweight		50 kg
Full anti-slip 900 x 300 mm	Diameter of anti-slip		Ø 435 mm
	Full anti-slip		900 x 300 mm